

# PIXIESPOT

FullColor RGBW compact LED Spot Luminaire

**PROLIGHTS**<sup>®</sup>  
PROFESSIONAL LIGHTS




PIXIESPOT it's the first Prolights spot moving head delivering a full spectrum chromatic synthesis, equipped with a 60W RGBW/FC LED light source to perform limitless bright, intense and saturated colors, as well as proper whites. PIXIESPOT can be also controlled wireless through the optional USB Wi-Fi receiver in combination with Wifibox and the smartphone App SmartColor.

## FEATURES

- 60W RGBW/FC Osram ostar LED source
- Color mixing featuring rich saturated and pastel colors and white reproduction as well
- Effect section equipped with 3f circular prism
- Gobo wheel: 7 rotating Gobos

-  **LIGHT SOURCE**  
60W RGBW Osram Ostar LED
-  **BEAM ANGLE**  
18°
-  **UTILITY**  
DMX512

## PHOTO GALLERY & APPLICATIONS

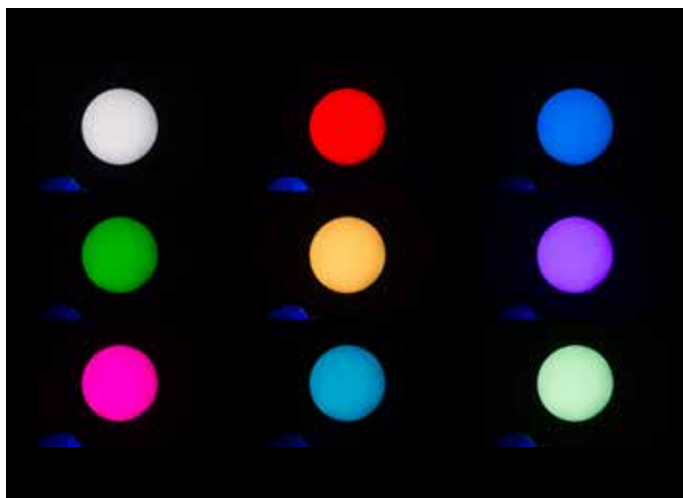

# PIXIESPOT

FullColor RGBW compact LED Spot Luminaire



## PIXIESPOT Technical Specification

### LIGHT SOURCE

Source:	60W RGBW Osram LEDs
Luminous Flux:	636lm
Lux:	1333lux@3m Full

### OPTICS

Beam Angle:	19°
Focus:	Motorised

### COLOR SYSTEM

Color Mixing:	RGBW/FC
CTC:	Linear CTC correction 2700~6000K
Color Wheel:	Virtual color wheel with presets

### DYNAMIC EFFECTS

Rotating Gobos:	7 Rotating gobos + Open, Interchangeable
Circular Prism:	3 with bi-directional rotation

### BODY

Pan Angle:	540°
Tilt Angle:	270°

### CONTROL

Protocols:	DMX512
------------	--------

### ELECTRONICS

Dimmer:	Linear 0~100% electronic dimmer
---------	---------------------------------

Dimmer Curves:	Different dimming curves available
----------------	------------------------------------

Strobe/Shutter:	1/28Hz, electronic
-----------------	--------------------

### ELECTRICAL

Power Consumption (at 230V):	118W
------------------------------	------

Power Consumption (at 120V):	120W
------------------------------	------

### PHYSICAL

Signal Connection:	DMX 5p IN/OUT Amphenol
--------------------	------------------------

Power Connection:	IN/OUT Neutrik Truecon
-------------------	------------------------

USB:	USB port for USB Wi-Fi receiver (optional)
------	--


IP:	20
-----	----

Dimensions (WxHxD):	253x352x192mm / 9.96"x13.86"x7.56"
---------------------	---------------------------------------


Weight:	7kg / 15.43lbs
---------	----------------



### TECHNICAL DRAWING

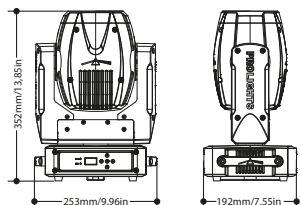

### PHOTOMETRIC DATA

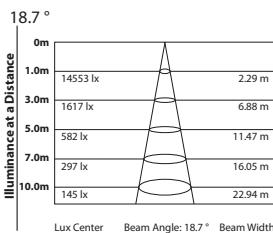

APPROVED



prolightsamerica.com



info@prolightsamerica.com  
www.prolightsamerica.com

Distributed by



A.C. Lighting Inc.  
Tel: +1 416-255-9494  
Fax: +1 416-255-3514

northamerica@aclighting.com  
www.aclighting.com