





## Fixture photometric table

**Fixture model**  
**Sandi at 2700**  
**Field:** 160°  
**Beam:** 110°  
**Magnification (mf):** 2.86 x  
**Candelas:** 600 Cd  
**Lumens:** 1200 lm  
**Watts:** 70 w  
**Lumen/w:** 9.4 lm/w  
**CRI Ra:** 97  
**TM-30 Rf / Rg:** 92 / 97  
**Duv:** 0.0024

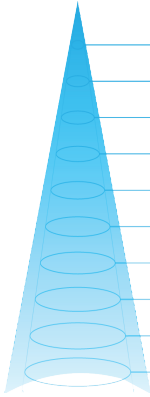


Throw Distance		Field Spread		Beam Spread		Full On	
m	ft	m	ft	m	ft	Lux	Footcandle
0.50 m	1.6 ft	5.7 m	18.6 ft	1.4 m	4.7 ft	2400 lx	223 fc
0.55 m	1.8 ft	6.2 m	20.5 ft	1.6 m	5.2 ft	1983 lx	184 fc
0.60 m	2.0 ft	6.8 m	22.3 ft	1.7 m	5.6 ft	1667 lx	155 fc
0.65 m	2.1 ft	7.4 m	24.2 ft	1.9 m	6.1 ft	1420 lx	132 fc
0.70 m	2.3 ft	7.9 m	26.0 ft	2.0 m	6.6 ft	1224 lx	114 fc
0.75 m	2.5 ft	8.5 m	27.9 ft	2.1 m	7.0 ft	1067 lx	99 fc
0.80 m	2.6 ft	9.1 m	29.8 ft	2.3 m	7.5 ft	937 lx	87 fc
0.85 m	2.8 ft	9.6 m	31.6 ft	2.4 m	8.0 ft	830 lx	77 fc
0.90 m	3.0 ft	10.2 m	33.5 ft	2.6 m	8.4 ft	741 lx	69 fc
0.95 m	3.1 ft	10.8 m	35.4 ft	2.7 m	8.9 ft	665 lx	62 fc

**Fixture model**  
**Sandi at 4400**  
**Field:** 160°  
**Beam:** 110°  
**Magnification (mf):** 2.86 x  
**Candelas:** 700 Cd  
**Lumens:** 1300 lm  
**Watts:** 72 w  
**Lumen/w:** 10.6 lm/w  
**CRI Ra:** 91  
**TM-30 Rf / Rg:** 89 / 101  
**Duv:** -0.002

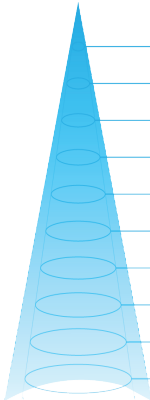

Throw Distance		Field Spread		Beam Spread		Full On	
m	ft	m	ft	m	ft	Lux	Footcandle
0.50 m	1.6 ft	5.7 m	18.6 ft	1.4 m	4.7 ft	2800 lx	260 fc
0.55 m	1.8 ft	6.2 m	20.5 ft	1.6 m	5.2 ft	2314 lx	215 fc
0.60 m	2.0 ft	6.8 m	22.3 ft	1.7 m	5.6 ft	1944 lx	181 fc
3.95 m	13.0 ft	44.8 m	147.0 ft	11.3 m	37.0 ft	45 lx	4 fc
0.70 m	2.3 ft	7.9 m	26.0 ft	2.0 m	6.6 ft	1429 lx	133 fc
0.75 m	2.5 ft	8.5 m	27.9 ft	2.1 m	7.0 ft	1244 lx	116 fc
0.80 m	2.6 ft	9.1 m	29.8 ft	2.3 m	7.5 ft	1094 lx	102 fc
0.85 m	2.8 ft	9.6 m	31.6 ft	2.4 m	8.0 ft	969 lx	90 fc
0.90 m	3.0 ft	10.2 m	33.5 ft	2.6 m	8.4 ft	864 lx	80 fc
0.95 m	3.1 ft	10.8 m	35.4 ft	2.7 m	8.9 ft	776 lx	72 fc

**Fixture model**  
**Sandi at 6000**  
**Field:** 160°  
**Beam:** 110°  
**Magnification (mf):** 2.86 x  
**Candelas:** 700 Cd  
**Lumens:** 1500 lm  
**Watts:** 70 w  
**Lumen/w:** 11.4 lm/w  
**CRI Ra:** 83  
**TM-30 Rf / Rg:** 84 / 98  
**Duv:** 0.0026

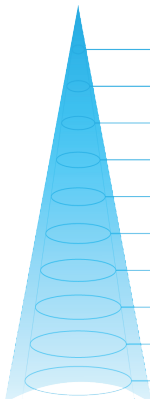

Throw Distance		Field Spread		Beam Spread		Full On	
m	ft	m	ft	m	ft	Lux	Footcandle
0.50 m	1.6 ft	5.7 m	18.6 ft	1.4 m	4.7 ft	2800 lx	260 fc
0.55 m	1.8 ft	6.2 m	20.5 ft	1.6 m	5.2 ft	2314 lx	215 fc
0.60 m	2.0 ft	6.8 m	22.3 ft	1.7 m	5.6 ft	1944 lx	181 fc
3.95 m	13.0 ft	44.8 m	147.0 ft	11.3 m	37.0 ft	45 lx	4 fc
0.70 m	2.3 ft	7.9 m	26.0 ft	2.0 m	6.6 ft	1429 lx	133 fc
0.75 m	2.5 ft	8.5 m	27.9 ft	2.1 m	7.0 ft	1244 lx	116 fc
0.80 m	2.6 ft	9.1 m	29.8 ft	2.3 m	7.5 ft	1094 lx	102 fc
0.85 m	2.8 ft	9.6 m	31.6 ft	2.4 m	8.0 ft	969 lx	90 fc
0.90 m	3.0 ft	10.2 m	33.5 ft	2.6 m	8.4 ft	864 lx	80 fc
0.95 m	3.1 ft	10.8 m	35.4 ft	2.7 m	8.9 ft	776 lx	72 fc