





Fixture photometric table

Fixture model
Space Force 2X4 2800K
Field: 160°
Beam: 80°
Magnification (mf): 1.68 x
Candelas: 26000 Cd
Lumens: 44700 lm
Watts: 671 w
Lumen/w: 38.8 lm/w
CRI Ra: 94
TM-30 Rf / Rg: 92 / 101
Duv: -0.0033

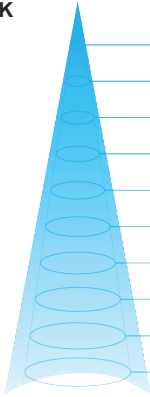


Throw Distance		Field Spread		Beam Spread		Full On	
m	ft	m	ft	m	ft	Lux	Footcandle
1.00 m	3.3 ft	11.3 m	37.2 ft	1.7 m	5.5 ft	26000 lx	2415 fc
1.53 m	5.0 ft	17.4 m	56.9 ft	2.6 m	8.4 ft	11107 lx	1032 fc
3.05 m	10.0 ft	34.6 m	113.5 ft	5.1 m	16.8 ft	2795 lx	260 fc
3.95 m	13.0 ft	44.8 m	147.0 ft	6.6 m	21.7 ft	1666 lx	155 fc
4.56 m	15.0 ft	51.7 m	169.7 ft	7.7 m	25.1 ft	1250 lx	116 fc
6.10 m	20.0 ft	69.2 m	227.0 ft	10.2 m	33.6 ft	699 lx	65 fc
6.85 m	22.5 ft	77.7 m	254.9 ft	11.5 m	37.7 ft	554 lx	51 fc
7.63 m	25.0 ft	86.5 m	283.9 ft	12.8 m	42.0 ft	447 lx	41 fc
9.15 m	30.0 ft	103.8 m	340.5 ft	15.4 m	50.4 ft	311 lx	29 fc
10.07 m	33.0 ft	114.2 m	374.7 ft	16.9 m	55.4 ft	256 lx	24 fc

Fixture model
Space Force 2X4 3200K
Field: 160°
Beam: 80°
Magnification (mf): 1.68 x
Candelas: 29600 Cd
Lumens: 51000 lm
Watts: 765 w
Lumen/w: 38.8 lm/w
CRI Ra: 96
TM-30 Rf / Rg: 93 / 102
Duv: -0.006

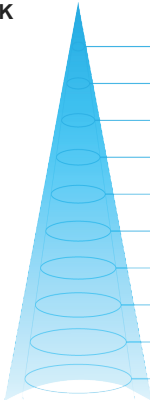

Throw Distance		Field Spread		Beam Spread		Full On	
m	ft	m	ft	m	ft	Lux	Footcandle
1.00 m	3.3 ft	11.3 m	37.2 ft	1.7 m	5.5 ft	29600 lx	2750 fc
1.53 m	5.0 ft	17.4 m	56.9 ft	2.6 m	8.4 ft	12645 lx	1175 fc
3.05 m	10.0 ft	34.6 m	113.5 ft	5.1 m	16.8 ft	3182 lx	296 fc
3.95 m	13.0 ft	44.8 m	147.0 ft	6.6 m	21.7 ft	1897 lx	176 fc
4.56 m	15.0 ft	51.7 m	169.7 ft	7.7 m	25.1 ft	1424 lx	132 fc
6.10 m	20.0 ft	69.2 m	227.0 ft	10.2 m	33.6 ft	795 lx	74 fc
6.85 m	22.5 ft	77.7 m	254.9 ft	11.5 m	37.7 ft	631 lx	59 fc
7.63 m	25.0 ft	86.5 m	283.9 ft	12.8 m	42.0 ft	508 lx	47 fc
9.15 m	30.0 ft	103.8 m	340.5 ft	15.4 m	50.4 ft	354 lx	33 fc
10.07 m	33.0 ft	114.2 m	374.7 ft	16.9 m	55.4 ft	292 lx	27 fc

Fixture model
Space Force 2X4 4400K
Field: 160°
Beam: 80°
Magnification (mf): 1.68 x
Candelas: 30300 Cd
Lumens: 52200 lm
Watts: 783 w
Lumen/w: 38.8 lm/w
CRI Ra: 97
TM-30 Rf / Rg: 92 / 101
Duv: -0.0064

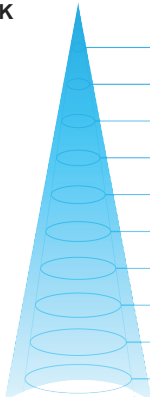

Throw Distance		Field Spread		Beam Spread		Full On	
m	ft	m	ft	m	ft	Lux	Footcandle
1.00 m	3.3 ft	11.3 m	37.2 ft	1.7 m	5.5 ft	30300 lx	2815 fc
1.53 m	5.0 ft	17.4 m	56.9 ft	2.6 m	8.4 ft	12944 lx	1203 fc
3.05 m	10.0 ft	34.6 m	113.5 ft	5.1 m	16.8 ft	3257 lx	303 fc
3.95 m	13.0 ft	44.8 m	147.0 ft	6.6 m	21.7 ft	1942 lx	180 fc
4.56 m	15.0 ft	51.7 m	169.7 ft	7.7 m	25.1 ft	1457 lx	135 fc
6.10 m	20.0 ft	69.2 m	227.0 ft	10.2 m	33.6 ft	814 lx	76 fc
6.85 m	22.5 ft	77.7 m	254.9 ft	11.5 m	37.7 ft	646 lx	60 fc
7.63 m	25.0 ft	86.5 m	283.9 ft	12.8 m	42.0 ft	520 lx	48 fc
9.15 m	30.0 ft	103.8 m	340.5 ft	15.4 m	50.4 ft	362 lx	34 fc
10.07 m	33.0 ft	114.2 m	374.7 ft	16.9 m	55.4 ft	299 lx	28 fc



Chroma-Q™

Fixture model

Space Force 2X4 5600K

Field: 160°

Beam: 80°

Magnification (mf): 1.68 x

Candelas: 31800 Cd

Lumens: 55000 lm


Watts: 825 w

Lumen/w: 38.6 lm/w

CRI Ra: 96

TM-30 Rf / Rg: 91 / 100

Duv: -0.0027

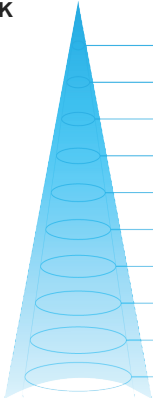

Fixture photometric table

Throw Distance		Field Spread		Beam Spread		Full On	
m	ft	m	ft	m	ft	Lux	Footcandle
1.00 m	3.3 ft	11.3 m	37.2 ft	1.7 m	5.5 ft	31800 lx	2954 fc
1.53 m	5.0 ft	17.4 m	56.9 ft	2.6 m	8.4 ft	13585 lx	1262 fc
3.05 m	10.0 ft	34.6 m	113.5 ft	5.1 m	16.8 ft	3418 lx	318 fc
3.95 m	13.0 ft	44.8 m	147.0 ft	6.6 m	21.7 ft	2038 lx	189 fc
4.56 m	15.0 ft	51.7 m	169.7 ft	7.7 m	25.1 ft	1529 lx	142 fc
6.10 m	20.0 ft	69.2 m	227.0 ft	10.2 m	33.6 ft	855 lx	79 fc
6.85 m	22.5 ft	77.7 m	254.9 ft	11.5 m	37.7 ft	678 lx	63 fc
7.63 m	25.0 ft	86.5 m	283.9 ft	12.8 m	42.0 ft	546 lx	51 fc
9.15 m	30.0 ft	103.8 m	340.5 ft	15.4 m	50.4 ft	380 lx	35 fc
10.07 m	33.0 ft	114.2 m	374.7 ft	16.9 m	55.4 ft	314 lx	29 fc

Fixture model

Space Force 2X4 6000K

Field: 160°

Beam: 80°

Magnification (mf): 1.68 x

Candelas: 31100 Cd

Lumens: 53600 lm


Watts: 805 w

Lumen/w: 38.7 lm/w

CRI Ra: 96

TM-30 Rf / Rg: 91 / 99

Duv: -0.0009

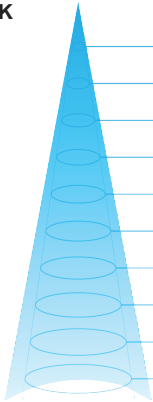

Throw Distance		Field Spread		Beam Spread		Full On	
m	ft	m	ft	m	ft	Lux	Footcandle
1.00 m	3.3 ft	11.3 m	37.2 ft	1.7 m	5.5 ft	31100 lx	2889 fc
1.53 m	5.0 ft	17.4 m	56.9 ft	2.6 m	8.4 ft	13285 lx	1234 fc
3.05 m	10.0 ft	34.6 m	113.5 ft	5.1 m	16.8 ft	3343 lx	311 fc
3.95 m	13.0 ft	44.8 m	147.0 ft	6.6 m	21.7 ft	1993 lx	185 fc
4.56 m	15.0 ft	51.7 m	169.7 ft	7.7 m	25.1 ft	1496 lx	139 fc
6.10 m	20.0 ft	69.2 m	227.0 ft	10.2 m	33.6 ft	836 lx	78 fc
6.85 m	22.5 ft	77.7 m	254.9 ft	11.5 m	37.7 ft	663 lx	62 fc
7.63 m	25.0 ft	86.5 m	283.9 ft	12.8 m	42.0 ft	534 lx	50 fc
9.15 m	30.0 ft	103.8 m	340.5 ft	15.4 m	50.4 ft	371 lx	35 fc
10.07 m	33.0 ft	114.2 m	374.7 ft	16.9 m	55.4 ft	307 lx	28 fc